

PCT/NZ03/00158
PCT/PTO 24 JAN 2003

Intellectual
Property Office
of New Zealand
Te Pou Rāhui Hanga Hou

Best Available Copy

REC'D 15 AUG 2003	
WIPO	PCT

CERTIFICATE

This certificate is issued in support of an application for Patent registration in a country outside New Zealand pursuant to the Patents Act 1953 and the Regulations thereunder.

I hereby certify that annexed is a true copy of the Provisional Specification as filed on 24 January 2002 with an application for Letters Patent number 516798 made by GARRICK ROSS JOHNSON.


I further certify that the Provisional Specification has since been postdated to 24 July 2002 under Section 12(3) of the Patents Act 1953.

Dated 1 August 2003.

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)



Neville Harris
Commissioner of Patents

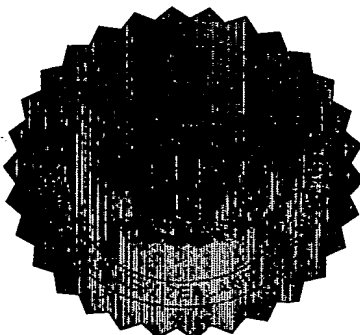

5

POST-DATED UNDER SECT. 12(3)

24/7/02

Patents Form No 4

10

Patents Act 1953**Provisional Specification**Intellectual Property
Office of NZ

24 JAN 2002

RECEIVED

15

SONIC DRILLING

I, Garrick Ross Johnson of 17 Hanrahan Street, Christchurch, New Zealand, a New Zealand citizen, do hereby declare this invention to be described in the following statement:

24 JAN 2002

Title

Sonic drilling

RECEIVED**Background to the invention**

5 Sonic drilling is a technique of driving a mandrel or a pipe into the ground such as
an earthen formation or into a semi solid object by creating a vibratory force and applying
the vibrations generated to the mandrel. The vibratory force generally consists of strong
sinusoidal sonic vibrations up to approximately 200Hz which are tuned to or close to the
resonant frequency of the mandrel. The effect of the sonic vibrations is to fluidize a
10 portion of the earth immediately surrounding the mandrel and when a load is applied to
the mandrel, the sonic vibrations will facilitate the passage of the mandrel into the earthen
formation. The soil surrounding the mandrel does not form part of the resonantly
vibrating system and instead the particles of the soil assume a random vibration relative
to each other and this fluidization will initially facilitate the passage of the mandrel
15 through the earth formation, and eventually lead to compaction of the soil around the
mandrel when the vibrations are removed.

Prior art

20 Resonant sonic drilling generally consists of a drill head which includes a form of
oscillator which can generate longitudinal sinusoidal pressure waves which are
transmitted to a mandrel which has a drill bit or similar at the free end of the mandrel.
Various means of generating the pressure waves for application to the mandrel are known
and one such means is disclosed in US Patent specification 5,417,290 (Barrow). This
specification describes a sonic head which includes a pair of eccentric rollers which
25 revolve at a high speed in a counter rotating direction within orbital races contained in the
head. The sonic head is fixed to the top of a mandrel and the energy impulses created
are thereby transmitted to the mandrel.

30 Other methods of creating and utilising sonic energy for application to a mandrel
are also disclosed in US Patent Specifications 3,375,884 (Bodine); 3,379,263 (Bodine);

4,836,299 (Bodine), 4,527,637 (Bodine); 5,549,170 (Barrow); and 5,562,169 (Barrow) and WO01/83933 (Bar-Cohen).

5 All of the above devices utilize a mechanical means such as counter-rotating rollers to generate the sinusoidal pressure waves and as such are prone to an undesirable amount of down time because of frictional problems and the high mechanical loading imparted to the componentry.

10 Another method of generating the sinusoidal pressure waves is described in WO 01/83933. The method consists in utilising piezoelectric stack as an actuator for generating the vibrations

Object of the invention

15 It is therefore an object of this invention to provide an improved means of generating sinusoidal pressure waves utilising a high pressure fluid acting directly on a piston within a cylinder.

Disclosure of the invention

20 Apparatus for generating sinusoidal pressure waves for application to a mandrel, said apparatus including a cylinder having an inlet gallery and at least one exhaust gallery, said cylinder housing a work piston which has a body having a radial wall, a first land at one end of the piston and a second land at the second end of the piston, the cylinder including means whereby fluid under pressure can be ducted from the inlet gallery to a chamber of the cylinder above the first land of the piston and be exhausted
25 from the chamber below the second land of the piston into the exhaust gallery to reciprocate the work piston within the chamber, the apparatus also including means whereby the forces generated by the reciprocatory motion can be transmitted to a mandrel.

30 Preferably the cylinder is supported by a rig and the work piston includes a piston shaft which is connectable to the mandrel.

Preferably the inlet gallery of the piston has an inlet port to enable pressurised fluid to enter the gallery, said inlet gallery communicating with the cylinder chamber through a port which terminates at the surface of the cylinder chamber wall.

5

Preferably the inlet gallery extends 360° around the cylinder wall.

10

Preferably the body of the work piston includes a first transfer gallery extending longitudinally through the body and communicating through the radial wall of the work piston with said inlet gallery for a predetermined time during the reciprocatory movement of the work piston and also communicating with the cylinder chamber through the first radial face of the work piston.

15

Preferably the body of the work piston includes a second transfer gallery extending longitudinally through the body and communicating through the radial wall of the work piston with said inlet gallery for a predetermined time during the reciprocatory movement of the work piston and also communicating with the cylinder chamber through the second radial face of the work piston.

20

Preferably the cylinder includes two exhaust galleries, wherein a first exhaust gallery communicates with the cylinder chamber above the first radial face of the work piston and the second exhaust gallery communicates with the cylinder chamber below the second radial face of the work piston, the first and second exhaust galleries including outlet ports to enable fluid within the galleries to be ducted away from the cylinder chamber.

25

Preferably the location of the opening of the first transfer gallery in the radial wall of the work piston is offset longitudinally to the opening of the second transfer gallery in the radial wall of the work piston.

Preferably the cylinder includes a relief bore having a first end open to the cylinder chamber above the first radial face of the work piston and having a second end open to the cylinder chamber below the second radial face of the work piston, said bore including a reciprocable relief piston, the movement of which is determined by the movement of fluid into and out of the relief bore from the cylinder chamber.

Brief description of the drawings

Preferred forms of the invention will now be described with the aid of the accompanying drawings wherein:

Figure 1 is a diagrammatic view, partly in section of the basic form of the sonic drill of the present invention.

Figure 2 is a diagrammatic sectional view illustrating a piston within the cylinder, the piston being in the neutral position.

Figure 3 is a diagrammatic view similar to Figure 2 but illustrating the piston at the commencement of a stroke in a first direction

Figure 4 is a diagrammatic view similar to Figure 2 but illustrating the piston at the commencement of a stroke in a second direction

Description of one preferred embodiment of the invention.

As illustrated particularly in Figure 1 of the drawings, the apparatus includes a drill head 1 which is positioned above the ground 2 and is suitably supported in a rig (not shown in the drawings) in a manner that will be apparent to those skilled in the art. The drill head includes a cylinder 3 on which a ballast weight 4 is mounted. A piston 5 has reciprocating longitudinal movement within the cylinder and the piston is connected to a piston shaft 6 which is guided at a first end in a sleeve 7 formed in the ballast weight 4. A suitable fluid seal 8 is located in the sleeve to ensure an adequate seal between the

interior of the cylinder and ambient. A seal 9 is also located in an end plate 10 to enable the piston chamber below the piston to be sealed from ambient. The piston shaft may be hollow to facilitate the sampling of cores as will be known in the art.

5 The piston shaft 6 bears on or forms part of a mandrel 11 or a drill string which as illustrated is partly embedded in the ground 2. Means (not shown in the drawings) as will be apparent to those skilled in the art may also be provided to rotate the drill string or mandrel to ensure the integrity of any screwed joints that may be employed in the drill string, and also to facilitate the disassembly of the drill string and the controlled guidance
10 of the drill string during operation.

As specifically illustrated in Figures 2, 3 and 4, the cylinder 3 includes an inlet gallery 12 having an inlet port 13 to which a source of high pressure fluid can be connected. The cylinder also includes a first exhaust gallery 14 having an outlet port 15
15 and a second exhaust gallery 16 having an outlet port 17.

The piston includes first transfer gallery 20 which is open at 21 in the axial face of the piston and which extends longitudinally through the piston to exit at 22 in the land 23 of the piston. As illustrated, the opening 21 is offset from the longitudinal center of the
20 piston. The piston also includes a second transfer gallery 25 one end of which is open at 26 through a port 30 in the axial wall of the piston with the other end being open at 27 in the land 28 of the piston. As in the case of the first transfer gallery 20, the opening 26 of the second transfer gallery 25 is offset from the longitudinal center of the piston an equivalent but opposite amount of distance to that of the opening 21.

25 The apparatus also includes a fluid by pass which in a highly preferred form comprises a bore 36 formed in the cylinder and which communicates via a duct 37 with the cylinder chamber 38 both above and below the piston 5. A reciprocating by pass piston 40 has free longitudinal movement within the bore 36 and suitable fluid seals 41
30 are located at either end of the piston 40 to prevent the passage of fluid past the seals.

In operation fluid under pressure is ducted to the port 13 and passes into the inlet gallery 12 which preferably extends 360° around the cylinder wall. When the piston is in the position indicated in Figure 3, the pressurized fluid will pass into the first transfer gallery 20 as indicated by the arrows and exit through the opening 22 in the axial face of the piston into the chamber 38. At this position the exhaust ports to the gallery 17 are closed while the exhaust ports to the gallery 14 are open so that the interior of the chamber above the piston is open to the gallery 14. It will be noted that at all times the chamber 38 both above and below the piston remain open to the ducts 37 and consequently to the bore 36.

The pressure of the fluid will act on the land 23 of the piston and this will cause the piston to move in the direction of the arrow A - A. The movement of the piston will then incrementally close the opening of the first transfer gallery 20 to the inlet gallery 12 and will incrementally close the cylinder chamber 38 to the exhaust gallery 14. When the piston has reached a stage whereby both the opening 21 of the first transfer gallery 20 to the inlet gallery 12 is closed and the chamber 38 is closed to the exhaust gallery 14, fluid within the chamber above the piston will tend to flow into the duct 37 and into the bore 36. Pressure will therefore be exerted on the end face of the by pass piston 40 which will move in the direction of the arrow. This will relieve the pressure in the chamber 38, and prevent excessive pressure build up in the chamber 38 above the piston, thereby allowing the work piston to complete its stroke.

As the work piston continues movement in the direction of the arrow A - A in Figure 3, the opening 26 of the second transfer gallery 25 will commence to register with the inlet gallery 12 and fluid under pressure will flow through the second transfer gallery 25 and out of the opening 27 in the land 28 of the piston into the chamber 38 above the piston. The upward movement of the piston will continue until the piston reaches the position illustrated in Figure 4, at which stage the pressure of the fluid entering the cylinder chamber 38 via the opening 27 in the second transfer duct 25 will commence to force the piston back into the second cycle of the operation.

The backwards and forwards movement of the piston illustrated in Figures 3 and 4 will accordingly automatically continue in conjunction with the resonant spring mass system of the drill string as long as fluid under pressure obtains within the inlet gallery and the fluid is able to exit from the exhaust galleries 14 and 16. It will of course be understood that the inlet and exhaust galleries are preferably joined into a loop into which an appropriate pump is located to generate the required fluid pressure.

Depending upon the relative volumes of the component parts and on the pressure of the fluid very considerable reciprocating forces can therefore be generated with the speed of reciprocation of the piston being dependent not only on the pressure of the fluid but also on the relative timing of the porting arrangement and also on the resonant frequency of the mandrel/drill string.

It will also be understood that the preferred form of fluid will generally be hydraulic or similar oil, but the fluid can also be a gas such as air or steam which is supplied at an appropriate volume and pressure by any known pressure generating system. One such pressure generating system can for instance be a form of internal combustion engine.

Having described a preferred form of the invention, it will be apparent to those skilled in the art that modifications and amendments can be made to the specific preferred embodiments and yet still come within the general concept of the invention. All such modifications and amendments are intended to fall within the scope of this invention.

Nigel West-Walker







Attorney for the applicant

Intellectual Property
Office of NZ

24 JAN 2002

RECEIVED

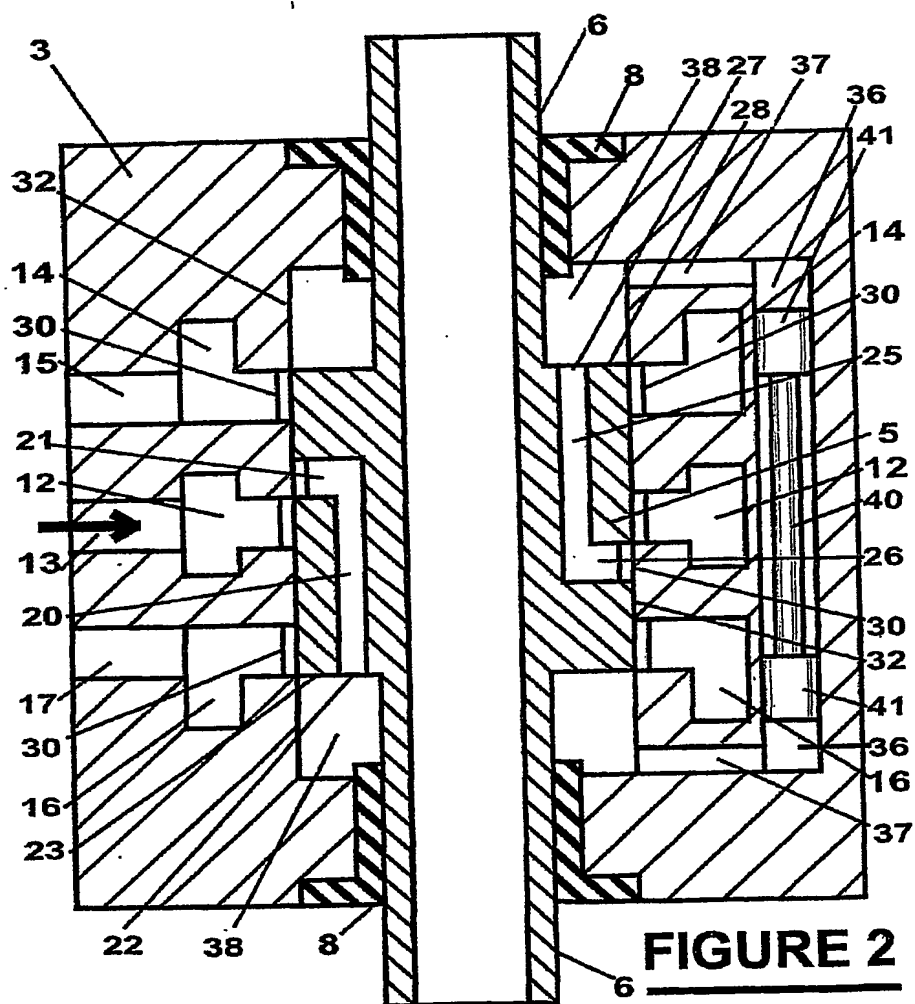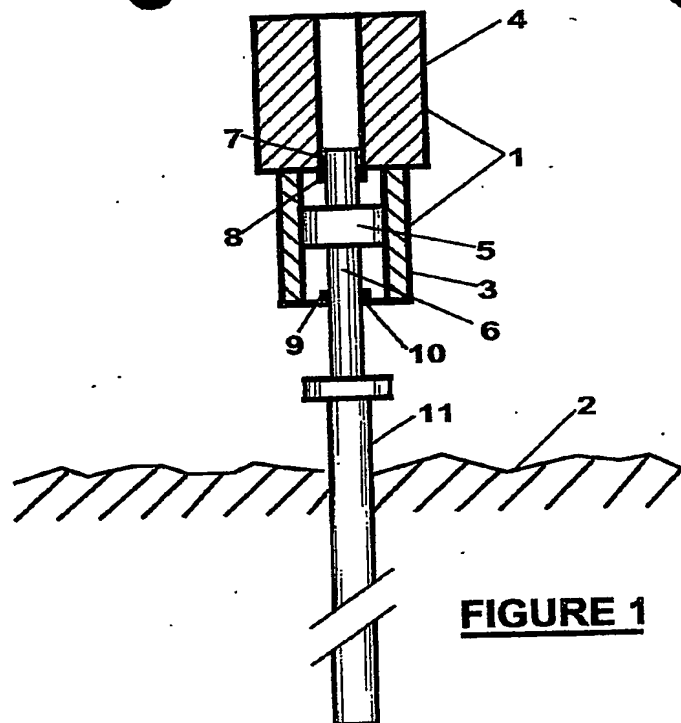

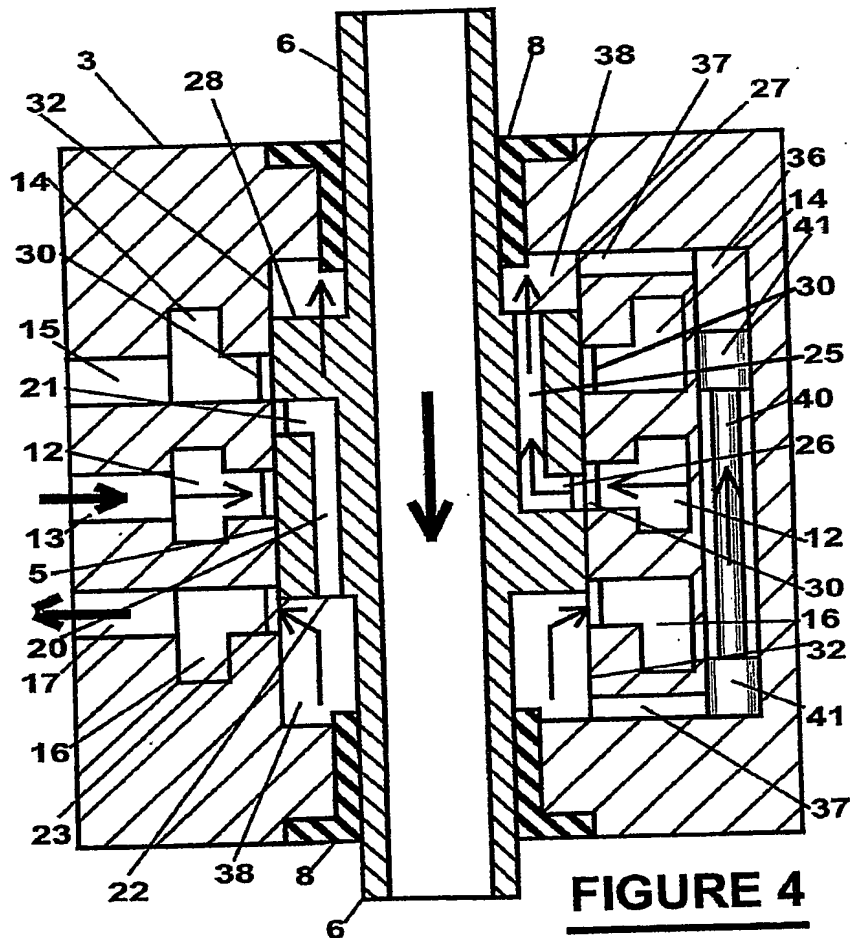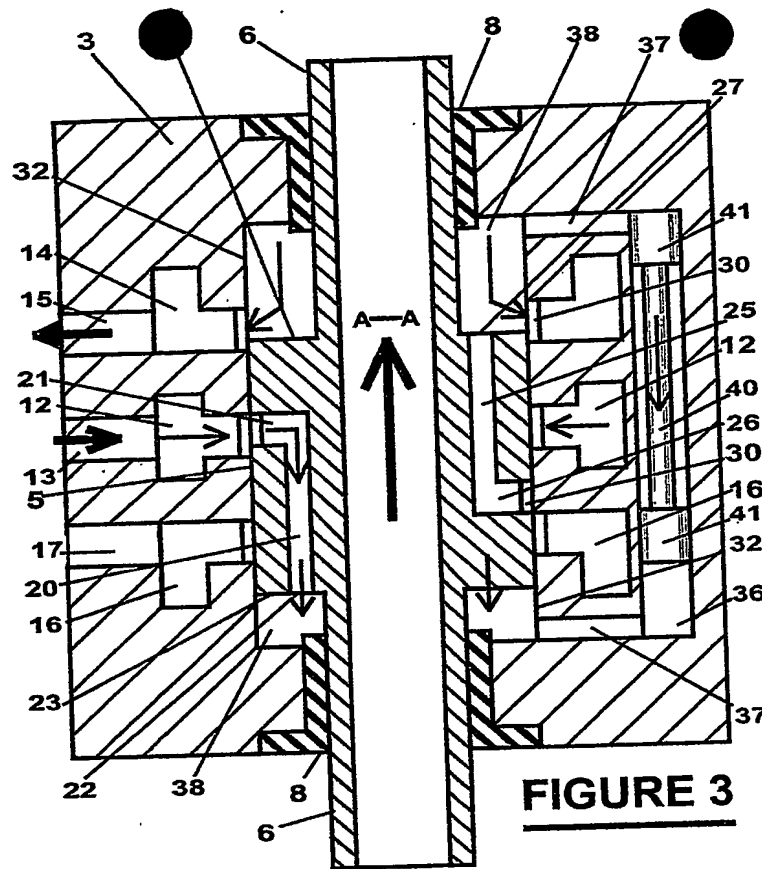

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ BLACK BORDERS

☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES

☐ FADED TEXT OR DRAWING

☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING

☐ SKEWED/SLANTED IMAGES

☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS

☐ GRAY SCALE DOCUMENTS

☐ LINES OR MARKS ON ORIGINAL DOCUMENT

☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY

☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.